




ECO-GRIP MAX[®] 250A

AIR COOLED MIG TORCH

184A CO₂, 160A Mixed Gas @ 60% Duty Cycle, EN60974-7, 0.8mm-1.2mm (.030"-0.045") Wires

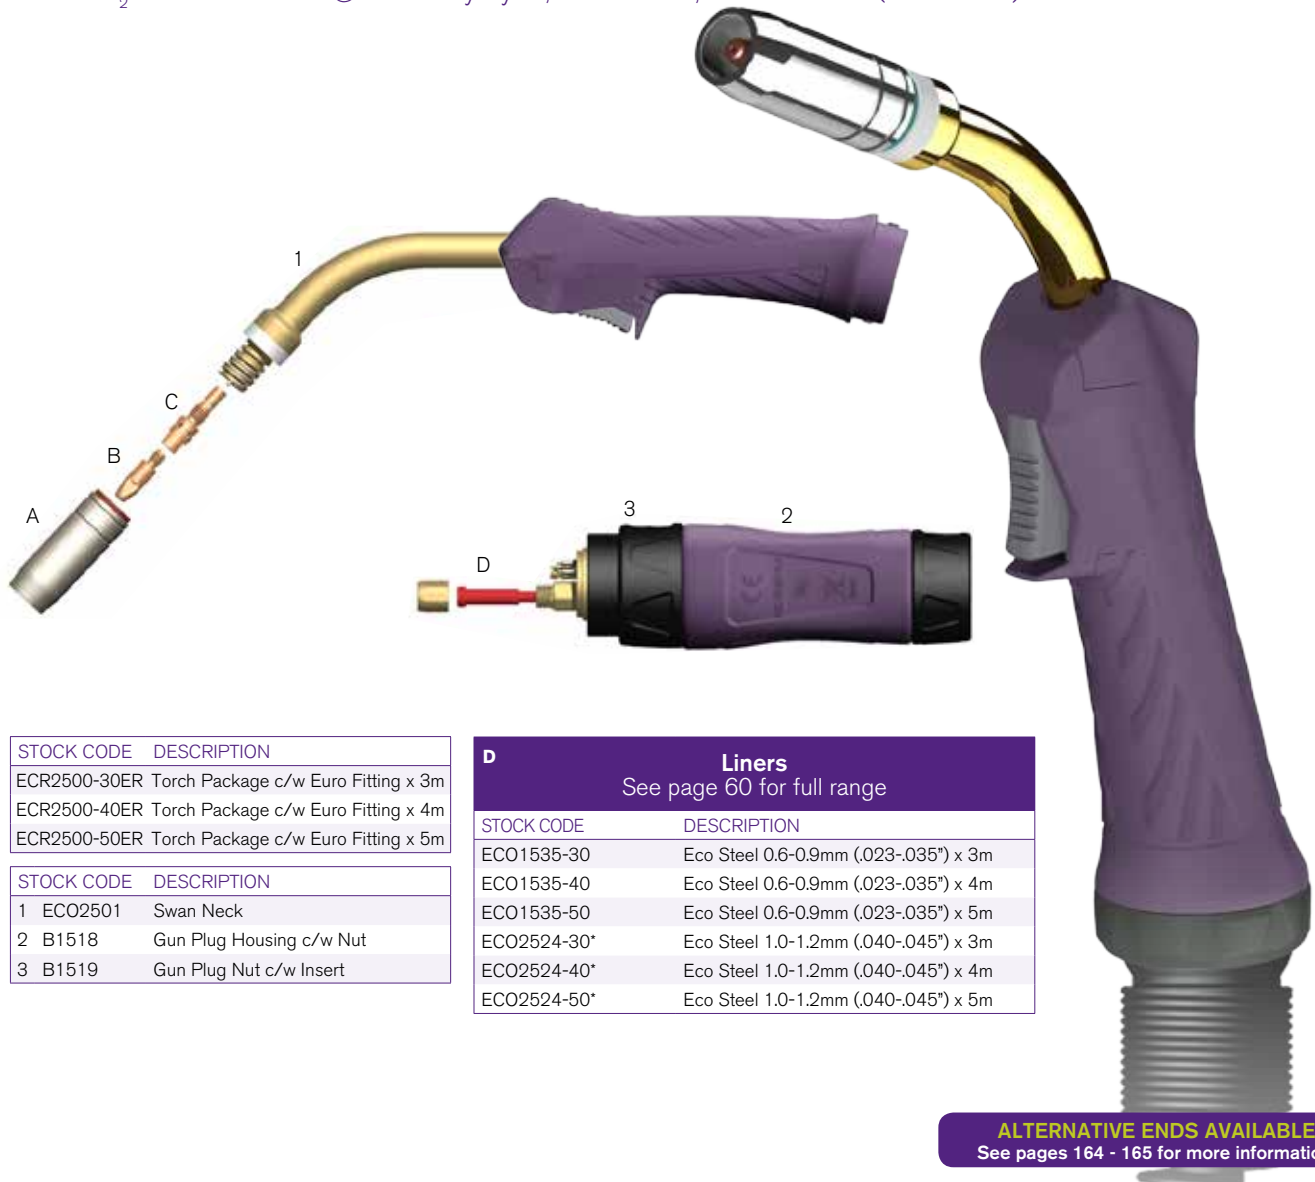

STOCK CODE	DESCRIPTION
ECR2500-30ER	Torch Package c/w Euro Fitting x 3m
ECR2500-40ER	Torch Package c/w Euro Fitting x 4m
ECR2500-50ER	Torch Package c/w Euro Fitting x 5m

STOCK CODE	DESCRIPTION
1 ECO2501	Swan Neck
2 B1518	Gun Plug Housing c/w Nut
3 B1519	Gun Plug Nut c/w Insert

D	Liners
See page 60 for full range	
STOCK CODE	DESCRIPTION
ECO1535-30	Eco Steel 0.6-0.9mm (.023-.035") x 3m
ECO1535-40	Eco Steel 0.6-0.9mm (.023-.035") x 4m
ECO1535-50	Eco Steel 0.6-0.9mm (.023-.035") x 5m
ECO2524-30*	Eco Steel 1.0-1.2mm (.040-.045") x 3m
ECO2524-40*	Eco Steel 1.0-1.2mm (.040-.045") x 4m
ECO2524-50*	Eco Steel 1.0-1.2mm (.040-.045") x 5m

ALTERNATIVE ENDS AVAILABLE
See pages 164 - 165 for more information.

PRO-GRIP MAX[®] AVAILABLE
See page 61 for more information

FULL PARTS BREAKDOWN AVAILABLE
visit www.parweld.com for more information.

Nozzles

A

STOCK CODE	STYLE	BORE
ECO2507	Cylindrical	18mm (5/7")
ECO2508*	Conical	15mm (19/32")
ECO2509	Tapered	12mm (15/32")

Contact Tips

B

STOCK CODE	WIRE SIZE	MATERIAL
ECO2504-08*	0.8mm (.030")	ECu
ECO2504-10	1.0mm (.040")	ECu
ECO2504-12	1.2mm (.045")	ECu

Tip Adaptors

C

STOCK CODE	TIP THREAD
ECO2506	M6

* Denotes standard build

ROLL MARKING

All Parweld consumables are roll marked to enable you to identify genuine Parweld product.