



Welding Tools for the Professional



A Smart Approach

Parker Torchology is shaped by people with vision, a passion for improvement and a belief in delivering the very best Welding and Cutting Torch Range in the World.

We expect a great deal from our products, so we ask a lot of ourselves and our engineers.

Our mantra: Innovation, Technology, Performance.





DNA

Design and Engineering excellence are at the core of everything we do.

Every torch we build is driven by our relentless pursuit of perfection.

Premium Features

At Parker Torchology we do things differently, we strive to solve your problems with the perfect product to suit your needs. We create smart product features encased in cutting-edge design to ensure you always have the best tools to hand.








ensures every welding torch we produce is worthy of the Parker Torchology name.

Testing, Testing, Testing

It takes patience to develop a new product, it's a lot more than a great idea.

Product development is an iterative process, trying something over and over, changing one small variable at a time.

We build endless prototypes and test pieces that undergo months of rigorous testing. Only once a product has passed up to 88 different test procedures, with every single part tested separately do we consider our latest designs ready for market.

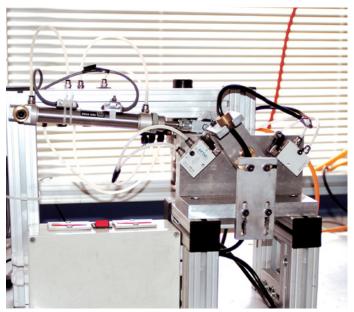



Partners

Our customers and business partners play a vital role in our development. With the core aim to strive together, we work with end-users, distributors and academic institutions alike.

As a result we share fundamental values in order to succeed in our respective market places, supporting economic growth and collaborative opportunities with others.





A Bright Future

Technology doesn't stand still, which is why we are constantly innovating to bring you the best products on the market.

Our strong vision and focused innovation strategy, not to mention our passion to revolutionize the industry, ensure that Parker Torchology is a byword for excellence.

We Talk Torches



Contents

| MLR Mig/Mag Torch Range Feature Focus | 6 |
|--|----|
| MLR Mig/Mag Torch Range Overview and Ratings | 7 |
| Tauch Danage | |
| Torch Range | |
| Suregrip MLR PST-ML150 | 8 |
| Suregrip MLR PST-ML 250 | 9 |
| Wear Parts | |
| Nozzles | 10 |
| Contact Tips | 10 |
| Tip Adaptors | 10 |
| Nozzle Adaptors | 10 |
| Liners | 11 |
| Rear-End Spare Parts | 11 |

Air-Cooled

Suregrip MLR Mig/Mag Torch Range

Air-Cooled Features Focus

The North American style MLR Series has been designed inline with the original specification.

Welding Tools for the Professional



100% Miller[®] Wear Parts Compatibility Guaranteed

Quality Wear Parts

All wear parts are manufactured to the same specification as the original manufacturer ensuring reliability, longevity and superior performance

Contact tips are manufactured using high quality copper alloys

"Plug and Play" Configurability

One + Plus system configured to your exact needs

- "Plug and play" switch interchangeability in seconds! try it!
- Switches are available with standard and extended lever options
- Micro-switch options for repetitive start/stop applications, digital power source control or harsh and dusty environments



ONE + PLUS SYSTEM



Tough and Resilient

Glass filled polymers are used to produce tough and resilient handle sets and rear-end housings

® All Trademarks are the property of their respective owners and usage is for cross reference only

Suregrip MLR Mig/Mag Torch Range

Ratings: 150 Amp to 200 Amp, Mixed Gas





| Model | PST-ML150 | PST-ML 250 |
|-------------------------|-----------------------------|-----------------------------|
| Technical Data | | |
| Cooling Method | Air-Cooled | Air-Cooled |
| Rating: CO ₂ | 180A | 230A |
| Rating: Mixed Gas | 150A | 200A |
| Duty Cycle | 60% | 60% |
| Wire Size | 0.6mm-0.9mm / 0.023"-0.035" | 0.6mm-1.2mm / 0.023"-0.045" |

| | 10′ ft | PST-ML 150A-10 | PST-ML 250A-10 |
|-------------|--------|----------------|----------------|
| Order Codes | 12'ft | PST-ML 150A-12 | PST-ML 250A-12 |
| | 15′ft | PST-ML 150A-15 | PST-ML 250A-15 |

PST-ML150 MLR Mig/Mag Torch Range

Swan Neck Assembly

Cable Terminal Cover

Cable Assembly x 10ft

Cable Assembly x 12ft

Cable Assembly x 15ft

Cable Terminal

Hanger Hook

Miller[®] Plug

Ergo Handle Location Body


Handle Cable Support c/w Ball Joint

Handle And Lock Nut Assembly

Standard Trigger Assembly

Extended Trigger Assembly

Rating:180A CO₂ 150A mixed gas, EN60974-7@ 60% duty cycle. 0.6 to 0.9mm / 0.023"-0.035" wires **Air-Cooled Mig Welding Torch**

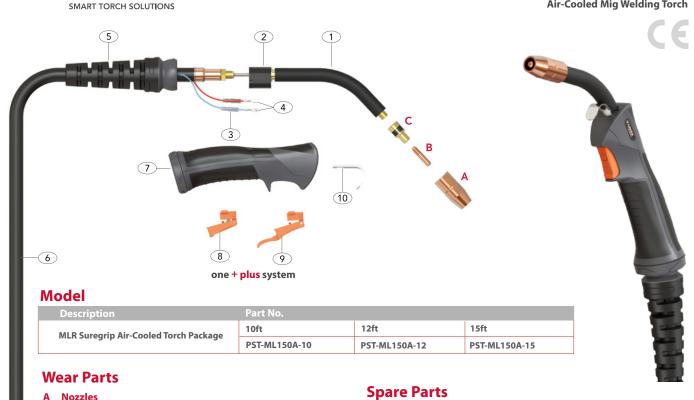

Part No. PLS-ML1501

PG1515

PB1521

PB1521-C

PSTH180-10E

PSTH180-12E

PSTH180-15E

SGB2514

DGB2516

DGB2516L

11 MILLERPLUG

10 PB2517

PG8015

1

2

3

4

5

6

7

8

9

Nozzles Α

242k

TORCHOLOGY

| · · · | HOLLICS | | | | |
|-------|-----------|----------------|------|-------|----------|
| | Part No. | Description | Bore | Wall | Material |
| | *M169-715 | Conical Nozzle | 13.0 | 1.5mm | Copper |
| | | | | | |

В **Contact Tips**

| Part No. | Description | Material | Wire | Size |
|-----------|-------------|----------|------|--------|
| | | | mm | Inch |
| M000-066 | Contact Tip | Copper | 0.6 | 0.023" |
| *M000-067 | Contact Tip | Copper | 0.8 | 0.030" |
| M000-068 | Contact Tip | Copper | 0.9 | 0.035" |

Nozzle Adaptors С

| Part No. | Description | Material |
|-----------|----------------|----------|
| *M169-716 | Nozzle Adaptor | Brass |

D Liners


| | Part No. | Description | Length | Wir | e Size |
|---|---|------------------------|---------------|---------|---------------|
| | *M10/ 011 10ft | Steel Liner x 10ft | 3 /0mt / 10ft | mm | Inch |
| | * M104 011 12ft | Steel Liner x 10ft | 4.10mt / 12ft | 0.0-0.9 | 0.030"-0.035" |
| | * M194-011-1210 | Steel Liner x 15ft | | | |
| | | Steel Liner x 10ft | | | |
| | | Steel Liner x 12ft | | | |
| | M194-012 | Steel Liner x 15ft | | | |
| | | | | 0.0 1.2 | 0.000 -0.040 |
| | | | | | |
| Ľ | Denotes torch package star | ndard wear part set-up | | | |
| | For more information please •Master Wear Parts T | | ctions: | | |
| | •Rear-End / Cable Pa | | | | |
| - | | | | | |
| | | | | | 11 |
| | | | | | AL C |
| - | | | | - | Lan |
| | | | | | |
| | | | | | |

All products conform to EN60974-7, CC and are RoHS2, REACH and WEEE compliant

PST- ML250 MLR Mig/Mag Torch Range

Rating:230A CO $_2$ 200A mixed gas, EN60974-7@ 60% duty cycle. 0.6 to 1.2mm / 0.023"-0.045" wires Air-Cooled Mig Welding Torch



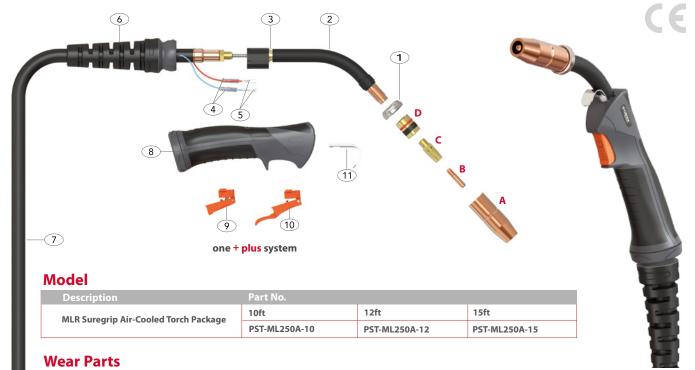

A Nozzles


| A | Nozzies | | | | |
|----|---|--|----------|----------|-----------|
| | Part No. | Description | Bore | Wall | Material |
| | M169-724 | Conical Nozzle | 13.0 | 2.75mm | Copper |
| | M169-725 | Conical Nozzle | 16.0 | 2.75mm | Copper |
| | M169-726 | Conical Nozzle | 16.0 | 2.75mm | Copper |
| | *M200-258 | Conical Nozzle | 13.0 | 2.75mm | Copper |
| В | Contact Tips | | | | |
| | Part No. | Description | Material | | 'ire Size |
| | M000-066 | Contact Tip | Copper | mi 0. | |
| | M000-067 | Contact Tip | Copper | 0. | |
| | *M000-068 | Contact Tip | Copper | 0. | |
| | M000-069 | Contact Tip | Copper | 1. | 2 0.045" |
| c | Tip Adaptors | | | | |
| | Part No. | Description | | M | laterial |
| | *M169-728 | Tip Adaptor | | | Brass |
| D | Nozzle Adapt | tors | | | |
| | Part No. | Description | | N | laterial |
| | *M169-729 | Nozzle Adaptor | | | Brass |
| | | | | | |
| | | | | | |
| De | enotes torch package st | andard wear part set-up | | | |
| Fo | r more information plea •Master Wear Parts | se refer to the following se Table Page 10-11 | ections: | | |
| | -iviaster vvear Parts | Table Fage 10-11 | | | |

E Liners Part N

| Part No. | Description | Length | Wire | e Size |
|----------------|--------------------|--------|---------|---------------|
| | | | mm | Inch |
| *M194-011-10ft | Steel Liner x 10ft | 3.40mt | 0.8-0.9 | 0.030"-0.035" |
| *M194-011-12ft | Steel Liner x 12ft | 4.10mt | 0.8-0.9 | 0.030"-0.035" |
| *M194-011 | Steel Liner x 15ft | 5.10mt | 0.8-0.9 | 0.030"-0.035" |
| M194-012-10ft | Steel Liner x 10ft | 3.40mt | 0.9-1.2 | 0.035"-0.045" |
| M194-012-12ft | Steel Liner x 12ft | 4.10mt | 0.9-1.2 | 0.035"-0.045" |
| M194-012 | Steel Liner x 15ft | 5.10mt | 0.9-1.2 | 0.035"-0.045" |

Spare Parts

| | Part No. | Description |
|----|-------------|-------------------------------------|
| 1 | P402-5 | Shock Washer |
| 2 | PLS-ML2501 | Swan Neck Assembly |
| 3 | PG1515 | Ergo Handle Location Body |
| 4 | PB1521-C | Cable Terminal Cover |
| 5 | PB1521 | Cable Terminal |
| 6 | PG8015 | Handle Cable Support c/w Ball Joint |
| 7 | PSTH200-10E | Cable Assembly x 10ft |
| | PSTH200-12E | Cable Assembly x 12ft |
| | PSTH200-15E | Cable Assembly x 15ft |
| 8 | SGB2514 | Ergo Handle Kit c/w Lock Nut |
| 9 | DGB2516 | Standard Trigger Assembly |
| 10 | DGB2516L | Extended Trigger Assembly |
| 11 | PB2517 | Hanger Hook |
| 12 | MILLERPLUG | Miller® Plug |

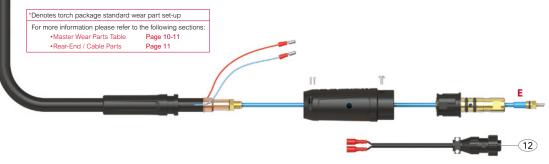

All products conform to EN60974-7, CC and are RoHS2, REACH and WEEE compliant




Nozzles

Wear Parts

Contact Tip

PST-ML 150A

| Part No. | Description | Bore | Wall | Material |
|-----------|----------------|------|-------|----------|
| *M169-715 | Conical Nozzle | 13.0 | 1.5mm | Copper |
| | | | | |

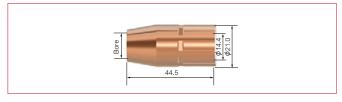


PST-ML 250A






Tip Adaptors

PST-ML 250A

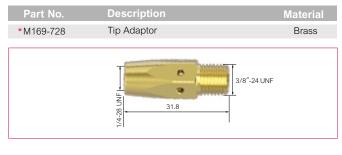


PST-ML 150A

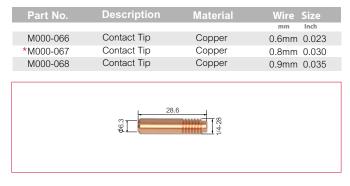

PST-ML 250A

| Part No. | Description | Material | Wire Size |
|-----------|-------------|----------|-------------|
| | | | mm Inch |
| M000-066 | Contact Tip | Copper | 0.6mm 0.023 |
| M000-067 | Contact Tip | Copper | 0.8mm 0.030 |
| *M000-068 | Contact Tip | Copper | 0.9mm 0.035 |
| M000-069 | Contact Tip | Copper | 1.2mm 0.045 |
| | | | |



Nozzle Adaptors

PST-ML 150A

| Part No. | Description | Material |
|-----------|--|----------|
| *M169-716 | Nozzle Adaptor | Brass |
| | 26.0 3.8"-24-28 3.8"-24-28 26.0 26.0 28.14-15 26.0 | |

PST-ML 250A

| Part No. | Description | Material |
|-----------|---|----------|
| *M169-729 | Nozzle Adaptor | Brass |
| | 23.8 4 4 4 4 4 4 4 4 4 4 4 4 4 | |

Wear Parts




Liner Options 0.8-1.2mm / 0.030"-0.045"

PST-ML 150A / 250A

| Part No. | Description | Length | Nipple | Wire Size | | | |
|-----------------|--------------------|---------------|--------------|---------------|----------------|--|--|
| | | | | mm | inch | | |
| * M194-011-10ft | Steel Liner x 10ft | 3.40mt / 10ft | Brass Nipple | 0.8mm-0.9mm 0 | .030''-0.035'' | | |
| * M194-011-12ft | Steel Liner x 12ft | 4.10mt / 12ft | Brass Nipple | 0.8mm-0.9mm 0 | .030''-0.035'' | | |
| * M194-011 | Steel Liner x 15ft | 5.10mt / 15ft | Brass Nipple | 0.8mm-0.9mm 0 | .030''-0.035'' | | |
| M194-012-10ft | Steel Liner x 10ft | 3.40mt / 10ft | Brass Nipple | 0.9mm-1.2mm 0 | .035''-0.045'' | | |
| M194-012-12ft | Steel Liner x 12ft | 4.10mt / 12ft | Brass Nipple | 0.9mm-1.2mm 0 | .035''-0.045'' | | |
| M194-012 | Steel Liner x 15ft | 5.10mt / 15ft | Brass Nipple | 0.9mm-1.2mm 0 | .035''-0.045'' | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

Air-Cooled Rear-End Spare Parts

PST-ML 150A / 250A

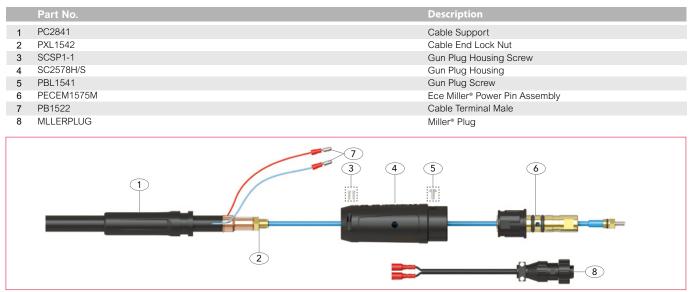



Jinan Export Processing Zone The East End of Jing Shi Dong Road Jinan 250102 P.R. China

Tel: +86 531 88239823 Fax: +86 531 88239398 Website: www.parkertorchology.com Email: info@parkertorchology.com MPP016 / V.2020.01